

### Heavy Duty Cranked Link Chain




### Features & Advantages



- High quality chain material.
- 100% Pre-stretching and excellent wear resistance.
- Roller made of high-quality medium carbon steel.
- Bush made of high-quality steel with case hardened.
- Chain plate made of high-quality medium carbon steel.
- Pin made of high-quality alloy steel.
- Imported environment-friendly super wear-resistant grease, whose adhesive thickness over 0.2mm.
- Chain twisting adjusted by specialized equipment, ensuring the same angle of twisting in two sides.

### Technical Specifications

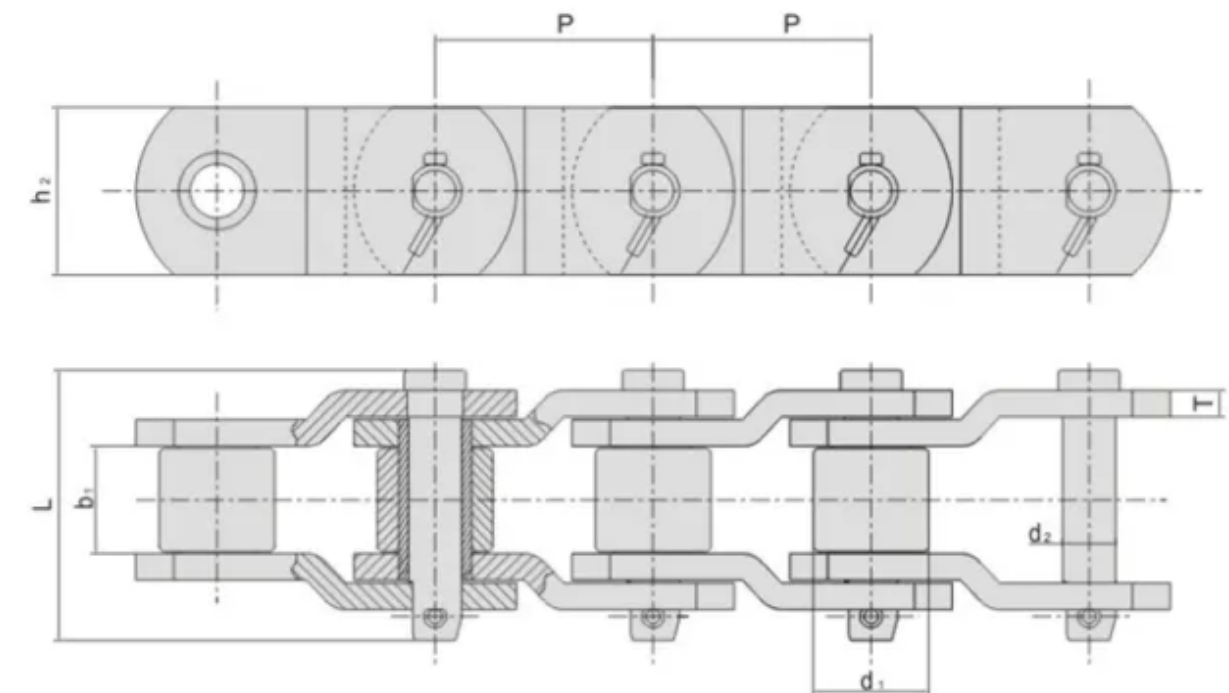

Email | [sales@hdsusa.us](mailto:sales@hdsusa.us)

Tel | +1 (832) 808-5116    Tel | +1 (832) 808-5164



<b>HDS Chain No.</b>		<b>2010</b>	<b>2510</b>	<b>2512</b>	<b>2515F2</b>	<b>2814</b>	<b>3214</b>	<b>3215</b>	<b>3618</b>	<b>4020</b>	<b>2184</b>	<b>MXS 882</b>	<b>MXS 3075</b>	<b>SS40H (P)</b>	<b>SS124</b>
<b>Pitch</b>	<b>P/mm</b>	63.5	78.1	77.9	77.9	88.9	103.2	103.45	114.3	127	152.4	66.27	78.1	78.11	103.20
<b>Roller Diameter</b>	<b>d1(Max)</b>	31.75	31.75	41.28	41.28	44.45	44.45	45.24	57.15	63.5	76.2	22.23	31.75	31.75	44.45
<b>Width Between Inner Plates</b>	<b>b1(Min)</b>	38.1	36.9	39.6	38.5	36.6	48	49.3	52.3	69.9	35	28.58	38.1	38.1	49.2
<b>Pin Diameter</b>	<b>d2(Max)</b>	15.9	16	19.05	19.05	22.23	22	23.85	27.97	31.78	22.2	11.1	16.46	15.88	22.23
<b>Pin Length</b>	<b>L(Max)</b>	90.7	94.8	100	103	117.6	123.5	130	138	165.7	96	68.5	93.5	97	127.2
<b>Plate Depth</b>	<b>H2 (Max)</b>	47.8	40	57	60	58	55	63.5	79.2	88.9	51	28.5	44.5	41.5	57
<b>Plate Thickness</b>	<b>T</b>	7.9	8	9.7	10	12.7	13	14.2	14.2	15.7	9.5	6.4	9.7	9.5	12.7
<b>Ultimate Tensile Strength</b>	<b>Q(Min) KN</b>	250	271	340	400	471	476	550	760	987	330	115.6	334	250	340
<b>Average Tensile Strength</b>	<b>Q KN</b>	270	292	367.2	420	507.6	514	594	820.8	1069.2	378	124.8	360.7	280	560
<b>Weight Per Meter</b>	<b>KG/M</b>	14	10.72	18.4	20.28	25.7	23.6	27.71	41.2	48.6	18.17	5.3	13.45	12.6	22.57