

### Conveyor Chain With Wsk Attachments




### Features & Advantages



- High quality chain material
- 100% Pre-stretching and excellent wear resistance
- Roller made of high-quality medium carbon steel
- Bush made of high-quality steel with case hardened
- Chain plate made of high-quality medium carbon steel
- Pin made of high-quality alloy steel
- Beveling
- Chain twisting adjusted by specialized equipment, ensuring the same angle of twisting in two sides

### Technical Specifications

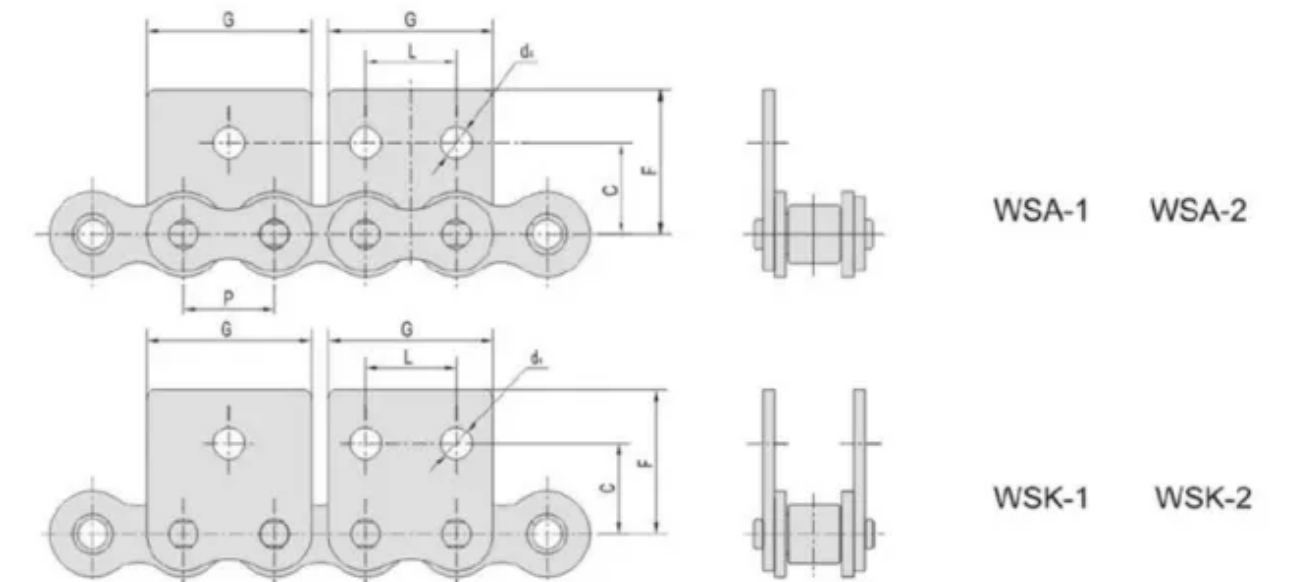

Email | [sales@hdsusa.us](mailto:sales@hdsusa.us)

Tel | +1 (832) 808-5116    Tel | +1 (832) 808-5164



HDS Chain No.		35-WSK1	40-WSK1	50-WSK1	60-WSK1	16A-WSK1	20A-WSK1	24A-WSK1	28A-WSK1
Pitch	P/mm	9.525	12.7	15.875	19.05	25.4	31.75	38.1	44.45
Attachment Dimensions	G/mm	17.32	23	28	34.65	45.9	57.65	69.3	80.45
Attachment Dimensions	L/mm	9.525	12.7	15.875	19.05	24.4	31.75	38.1	44.45
Attachment Dimensions	C/mm	9.5	12.7	15.9	18.3	24.6	31.8	36.5	44.5
Attachment Dimensions	F/mm	14.55	17.4	23.05	26.86	35.45	44	51.6	62
Attachment Dimensions	d4/mm	2.8	3.4	5.5	5.5	6.8	9.2	9.8	11.4

<b>HDS Chain No.</b>		<b>32A-WSK1</b>	<b>08B-WSK1</b>	<b>10B-WSK1</b>	<b>12B-WSK1</b>	<b>16B-WSK1</b>	<b>20B-WSK1</b>	<b>24B-WSK1</b>	<b>16A-WSK2F1</b>	<b>16B-WSK OF 1</b>
<b>Pitch</b>	<b>P/mm</b>	50.8	12.7	15.875	19.05	25.4	31.75	38.1	25.4	25.4
<b>Attachment Dimensions</b>	<b>G/mm</b>	92	23.3	29.58	34.05	46.4	58.1	71.4	48.6	46.4
<b>Attachment Dimensions</b>	<b>L/mm</b>	50.8	12.7	15.875	19.05	25.4	31.75	38.1	25.4	/
<b>Attachment Dimensions</b>	<b>C/mm</b>	50.8	13.35	16.5	21.45	23.15	30.5	36	24.6	/
<b>Attachment Dimensions</b>	<b>F/mm</b>	69.85	18.9	22.95	28.6	34	45.7	52.9	34.25	25
<b>Attachment Dimensions</b>	<b>d4/mm</b>	13.1	4.3	5.3	6.4	6.4	9	10.5	6.7	/