

Conveyor Chain With Kattachments




Features & Advantages



- High quality chain material
- Excellent wear resistance
- Roller made of high-quality medium carbon steel
- Chain plate made of high-quality medium carbon steel
- Ultimate tensile Pre-stretching under dual-hydrocylinders, decreasing chain elongation by 30%
- Imported environment-friendly super wear-resistant grease, whose adhesive thickness over 0.2mm
- Chain twisting adjusted by specialized equipment, ensuring the same angle of twisting in two sides
- Attachments sufficiently annealed, little springback occurred after attachment bending

Technical Specifications

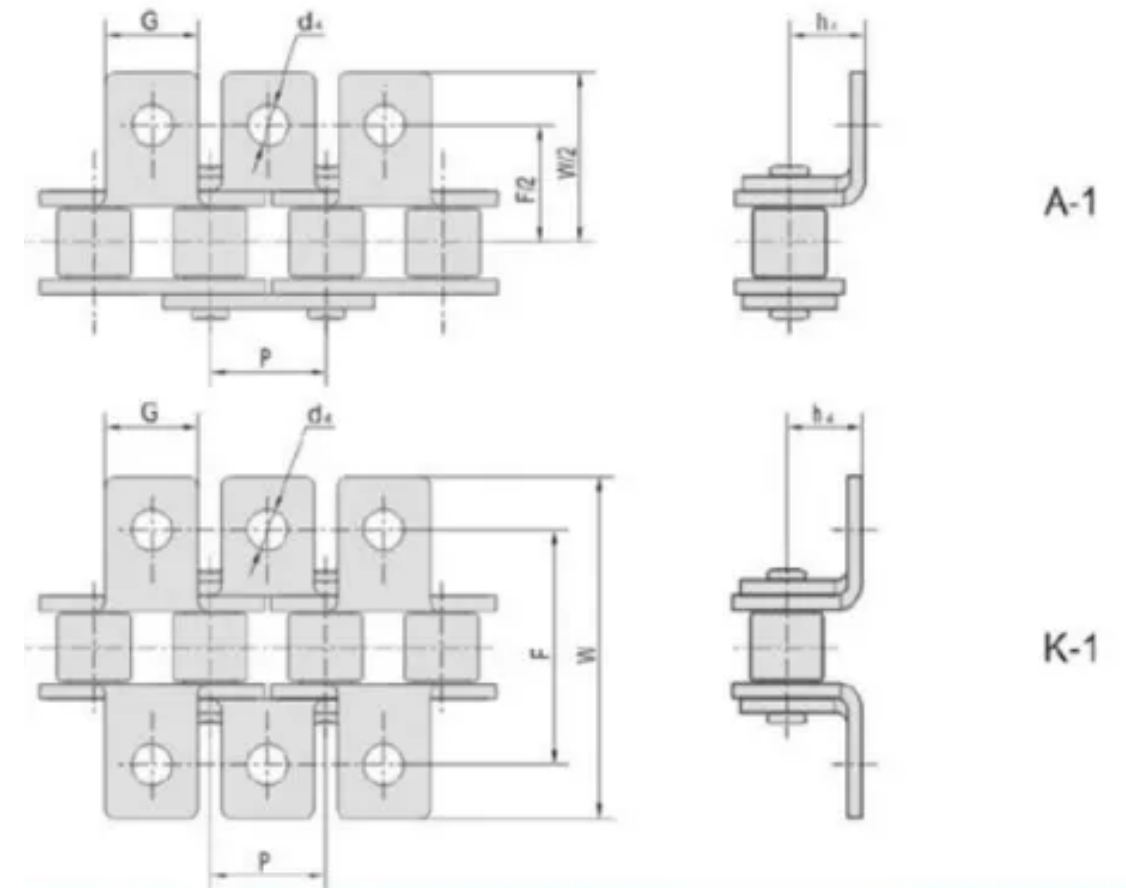

Email | sales@hdsusa.us

Tel | +1 (832) 808-5116 Tel | +1 (832) 808-5164



HDS Chain No.		35 -K1	40 -K1	50 -K1	60 -K1	16A -K1	20A -K1	24A -K1	28A -K1	30A -K1	06B -K1	08B -K1	10B -K1	12B -K1
Pitch	P/mm	9.525	12.7	15.875	19.05	25.4	31.75	38.1	44.45	50.8	9.525	12.7	15.875	19.05
Attachment Dimensions	G/mm	7.9	9.5	12.7	15.9	19.1	25.4	28.6	34.9	38.1	8	9.5	14.3	16
Attachment Dimensions	F/mm	19	25.4	31.75	38.1	50.8	63.5	76.2	88.9	101.6	19	25.4	31.75	38.1
Attachment Dimensions	W/mm	28.6	35.2	46.2	55.6	64.8	87.3	108.5	123	142.8	27	36.4	44.6	52.4
Attachment Dimensions	h4/mm	6.35	7.9	10.3	11.9	15.9	19.8	23	28.6	31.8	6.5	8.9	10.31	13.46
Attachment Dimensions	d4/mm	2.8	3.4	5.5	5.5	6.8	9.2	9.8	11.4	13.1/14.3	3.5	4.5	5.3	6.4

HDS Chain No.		16B-K1	20B-K1	24B-K1	50-A1F5	60-K1Y2	60-K1Y3	60-K1Y4	16A-K1Y1	16A-K1Y2	16A-K1Y3	16A-K1Y4	16A-K1Y5	16A-K1F5
Pitch	P/mm	25.4	31.75	38.1	15.875	19.05	19.05	19.05	25.4	25.4	25.4	25.4	25.4	25.4
Attachment Dimensions	G/mm	19.1	25	30	12.7	15.9	15.9	15.9	29	25.4	19.1	19.1	19.1	19.1
Attachment Dimensions	F/mm	50.8	64.3	76.2	31.74	38.1	38.1	40	58	50.8	50.8	50.8	55.56	50.8
Attachment Dimensions	W/mm	72.6	85.5	108.4	44.6	55.6	55.6	56	83	73.2	73.2	64.8	73.2	64.8
Attachment Dimensions	h4/mm	15.88	19.8	26.7	10.3	11.9	11.9	12.5	16	15.9	15.9	15.9	15.9	15.9
Attachment Dimensions	d4/mm	6.4	8.5	10.5	5.2	6.4	5.5	6.6	8.25	8.2	8.5	6.8	6.8	6.2

HDS Chain No.		20A-K1Y1	32A-K1Y1	08B-K1Y2	08B-K1F1	10B-K1Y1	10B-K1Y2	12B-K1F1	16B-K1F1	16B-K1Y2	16B-K1Y6	16B-K1N1	20B-K1F1	24B-K1F1
Pitch	P/mm	31.75	50.8	12.7	12.7	15.875	15.875	19.05	25.4	25.4	25.4	25.4	31.75	38.1
Attachment Dimensions	G/mm	25.4	38.1	17.9	31.75	15	13	16.35	25	24	25	26	35	55
Attachment Dimensions	F/mm	63.5	101.6	27.58	25.4	33.4	29.41	51.6	58	58	57.8	58.12	63.5	77.64
Attachment Dimensions	W/mm	87.3	142.8	39.58	35.2	44.4	42.21	12	75.6	75.6	83.6	74.12	100.5	108.44
Attachment Dimensions	h4/mm	19.8	31.8	8	8.9	10	10	6.4	18	18	19	18	19.8	26.7
Attachment Dimensions	d4/mm	10.5	14.3	7.1	4.5	5.5	5.5		9	10.5	9	9	9	13